

DTC P0335 CKP SENSOR (POS)

< SERVICE INFORMATION >

[QR25DE]



DTC P0335 CKP SENSOR (POS)

Component Description

INFOID:000000007405001

The crankshaft position sensor (POS) is located on the cylinder block rear housing facing the gear teeth (cogs) of the signal plate at the end of the crankshaft. It detects the fluctuation of the engine revolution. The sensor consists of a permanent magnet and Hall IC. When the engine is running, the high and low parts of the teeth cause the gap with the sensor to change. The changing gap causes the magnetic field near the sensor to change. Due to the changing magnetic field, the voltage from the sensor changes. The ECM receives the voltage signal and detects the fluctuation of the engine revolution.

ECM receives the signals as shown in the figure.

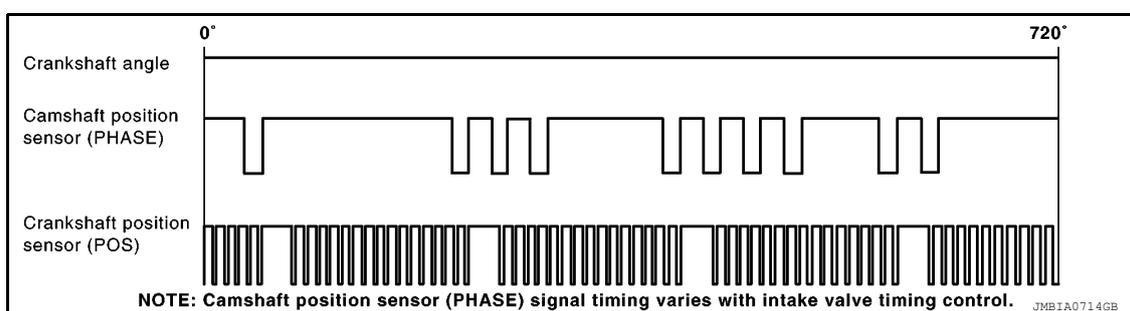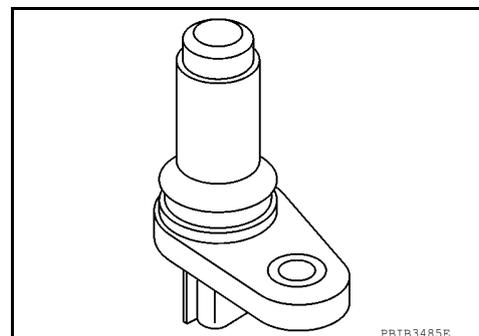

CONSULT Reference Value in Data Monitor Mode

INFOID:000000007405002

Specification data are reference values.

Monitor item	Condition	Specification
ENG SPEED	<ul style="list-style-type: none"> Run engine and compare CONSULT value with the tachometer indication. 	Almost the same speed as the tachometer indication.

On Board Diagnosis Logic

INFOID:000000007405003

DTC No.	Trouble diagnosis name	DTC detecting condition	Possible cause
P0335 0335	Crankshaft position sensor (POS) circuit	<ul style="list-style-type: none"> The crankshaft position sensor (POS) signal is not detected by the ECM during the first few seconds of engine cranking. The proper pulse signal from the crankshaft position sensor (POS) is not sent to ECM while the engine is running. The crankshaft position sensor (POS) signal is not in the normal pattern during engine running. 	<ul style="list-style-type: none"> Harness or connectors [Crankshaft position sensor (POS) circuit is open or shorted.] (Accelerator pedal position sensor circuit is shorted.) (Refrigerant pressure sensor circuit is shorted.) (EVAP control system pressure sensor circuit is sorted.) Crankshaft position sensor (POS) Accelerator pedal position sensor (APP sensor 2) Refrigerant pressure sensor EVAP control system pressure sensor Signal plate

DTC Confirmation Procedure

INFOID:000000007405004

NOTE:

If DTC Confirmation Procedure has been previously conducted, always turn ignition switch OFF and wait at least 10 seconds before conducting the next test.